



Dimensions

| | | |
|---------------|-----|-----|
| A (mm) | 275 | 375 |
| | 475 | 575 |
| B (mm) | | |
| H (mm) | | |
| Capacity (kg) | | |

Material to be conveyed

Specify presence of lubricant, coolant or other fluid, if present.

(*) Different inclination on request

(**) Different size on request



Notes



Standard features

DRIVE UNIT

- Position: LH side
- Speed: 6,5 m/min fixed
- Voltage: 400 V / 50 Hz
- With ON/OFF switch

BELT

- Plastic belt in glass-fibre reinforced PA6
- Modular slats h 35 or h 45 mm, pitch 400 mm
- Operating temperature: da +1 °C a +130 °C



Options

DRIVE UNIT

Mounted on opposite side: RH side

SPECIAL PLASTIC BELTS


Perforated plastic belt: for cooling applications
Plastic belt in dark grey colour

CONTROL PANEL

INVERTER: adjustable speed from to m/min
PAUSE/WORK: timed run and stop
PULSE: timed run activated by voltage-free external signal
FEEDER: run and stop controlled by voltage-free external signal

LOADING HOPPER

Loading hopper L = mm, H = mm, P = mm

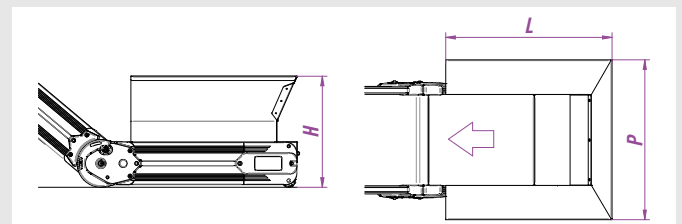

UNLOADING CHUTE / SEPARATOR

Standard unloading chute

Single-roller separator mod. N-SRS

Spiral-roller separator mod. N-FSRV

