

→ Dimensions

A (mm)	275	375
	475	575
B (mm)		
H (mm)		
Capacity (kg)		

Material to be conveyed

Specify presence of lubricant, coolant or other fluid, if present.

(*) Different inclination on request

(**) Different size on request

→ Standard features

DRIVE UNIT

- Position: LH side
- Speed: 6,5 m/min fixed
- Voltage: 400 V / 50 Hz
- With ON/OFF switch

BELT

- Plastic belt in glass-fibre reinforced PA6
- Modular slats h 35 or h 45 mm, pitch 400 mm
- Operating temperature: da +1 °C a +130 °C

→ Notes

→ Options

DRIVE UNIT

Mounted on opposite side: RH side

SPECIAL PLASTIC BELTS


Perforated plastic belt: for cooling applications
Plastic belt in dark grey colour

CONTROL PANEL

- INVERTER:** adjustable speed from to m/min
- PAUSE/WORK:** timed run and stop
- PULSE:** timed run activated by voltage-free external signal
- FEEDER:** run and stop controlled by voltage-free external signal


LOADING HOPPER

Loading hopper L = mm, H = mm, P = mm

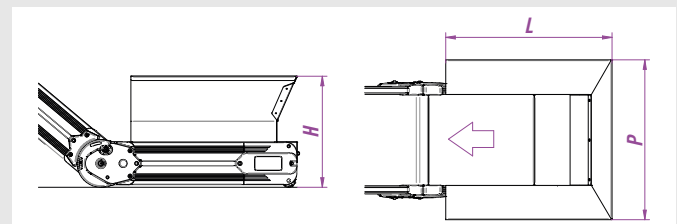

UNLOADING CHUTE / SEPARATOR

- Standard unloading chute**
- Single-roller separator mod. N-SRS**
- Spiral-roller separator mod. N-FSRV**
- Integrated rotating chute mod. N-DUCK (*)**

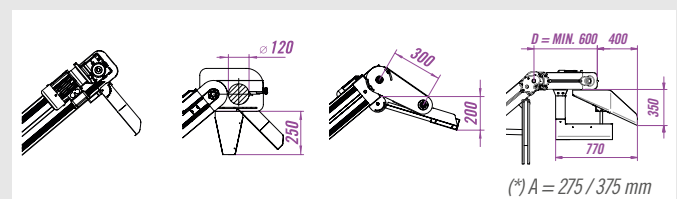

(*) A = 275 / 375 mm