

### → Dimensions

A (mm)	140	240	340
	440	540	
B (mm)			
H (mm)			
Capacity (kg)			

### Material to be conveyed

Specify presence of lubricant, coolant or other fluid, if present.

### → Supports

Standard support with gas pistons  
Simplified legs - Easy Line version

(\*): Different size on request

### → Notes

### → Standard features

#### DRIVE UNIT

- Position: LH side
- Speed: 4,5 m/min fixed
- Voltage: 400 V / 50 Hz
- With ON/OFF switch

#### BELT

- Smooth green PU covering (ref. Pantone 320)
- Vulcanized belt joint
- Heat-welded slats h 30 mm pitch 400 mm
- Operating temperature: -10 °C to +90 °C

### → Options

#### DRIVE UNIT

Mounted on opposite side: RH side

#### BELT

High grip PVC	+ slats h	<input type="text"/>	mm pitch	<input type="text"/>
Smooth PU	+ slats h	<input type="text"/>	mm pitch	<input type="text"/>
Smooth PU	+ spondaflex h 30 mm +			
slats h 20 mm	pitch	<input type="text"/>		

#### CONTROL PANEL

**INVERTER:** adjustable speed from  to  m/min


**PAUSE/WORK:** timed run and stop

**PULSE:** timed run activated by voltage-free external signal

**FEEDER:** run and stop controlled by voltage-free external signal

#### LOADING HOPPER

Loading hopper L =  mm, H =  mm, P =  mm

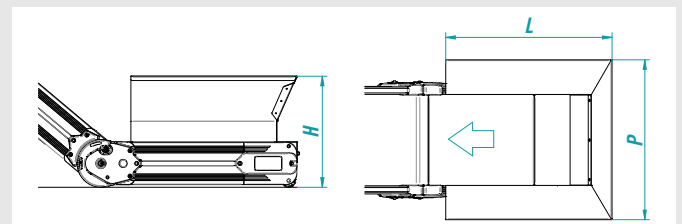

#### UNLOADING CHUTE / SEPARATOR

Standard unloading chute

Single-roller separator mod. N-SRS

Spiral-roller separator mod. N-FSRV

