


#### → Dimensions

<b>A (mm)</b>	140	240	340
<b>D (mm)</b>	440	540	
<b>E (mm)</b>			
<b>F (mm)</b>			
<b>G (mm)</b>			
<b>H (mm)</b>			
<b>I (mm)</b>			
<b>L (mm)</b>			
<b>Capacity (kg)</b>			

#### Material to be conveyed

Specify presence of lubricant, coolant or other fluid, if present.

#### → Notes

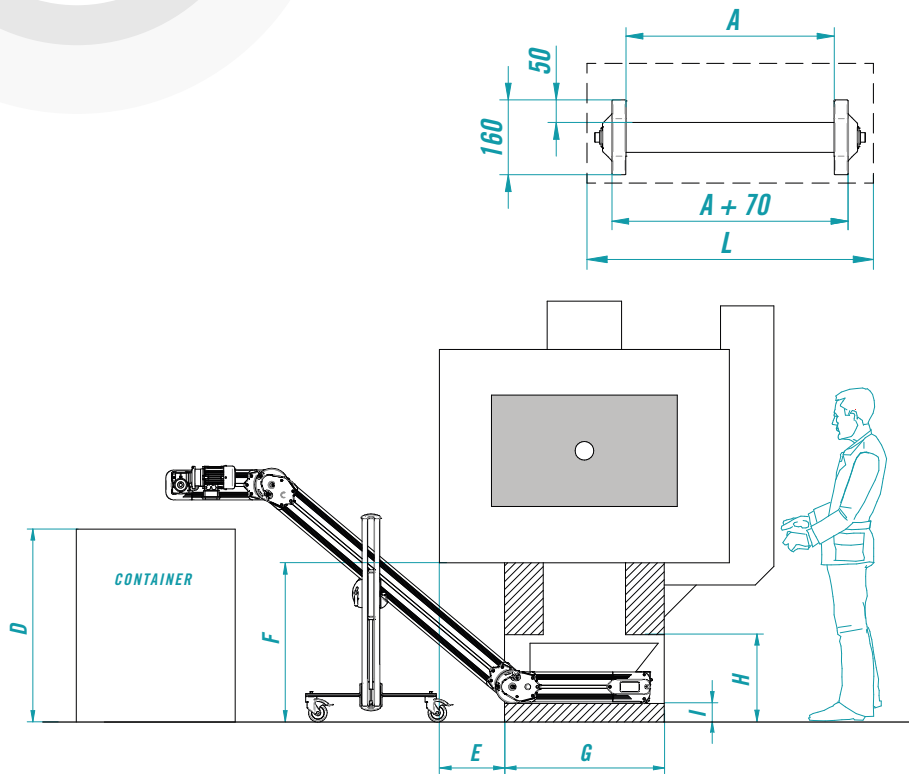

#### → Standard features

##### DRIVE UNIT

- Position: LH side
- Speed: 4,5 m/min fixed
- Voltage: 400 V / 50 Hz
- With ON/OFF switch

##### BELT

- Smooth green PU covering (ref. Pantone 320)
- Vulcanized belt joint
- Heat-welded slats h 30 mm pitch 400 mm
- Operating temperature: -10 °C to +90 °C

#### Options

##### BELT

High grip PVC	+ slats h	<input type="text"/>	mm pitch	<input type="text"/>
Smooth PU	+ slats h	<input type="text"/>	mm pitch	<input type="text"/>
Smooth PU	+ spondaflex h 30 mm +			
slats h 20 mm	pitch	<input type="text"/>		

##### CONTROL PANEL

- INVERTER:** adjustable speed from  to  m/min
- PAUSE/WORK:** timed run and stop
- PULSE:** timed run activated by voltage-free external signal
- FEEDER:** run and stop controlled by voltage-free external signal

##### DRIVE UNIT

Mounted on opposite side: RH side

##### UNLOADING CHUTE / SEPARATOR

Standard unloading chute

Single-roller separator mod. N-SRS

Spiral-roller separator mod. N-FSRV

Integrated rotating chute mod. N-DUCK (\*)

